



⚡ Electrical heat 3-9 kW

13 models



## Elektra - C/F/V/H

### A fan heater for extreme conditions

Elektra is a high quality product. The compact Elektra is manufactured from stainless steel and is primarily intended for fixed installation. The brackets can be angled for portable use if required.

Elektra is available in four versions:

- Elektra C for corrosive environments. For use in humid and aggressive environments e.g. car-wash areas.
- Elektra F for rooms where there is a risk of fire. Special design for use in rooms where there is risk of fire, within the textile and wood industry and in agricultural buildings etc.
- Elektra V is for use on ships and within the offshore industry, withstands vibrations and humidity. Approved by Det Norske Veritas.
- Elektra H for high temperatures. When there is a demand for high temperatures (up to 70°C), Elektra is powerful enough to meet the challenge.

- For fixed installation or portable use.
- Casing: stainless steel, Elektra C acid resistant. Grille and bracket: RAL 3020 (red).
- Output: 3, 6, 9 and 15 kW.
- Elektra V has reinforced electrical insulation, motor and heating elements have a construction that absorbs vibrations. Also manage 440V/60Hz.
- Available in four versions for different demanding environments.


**Technical specifications** | Fan heater Elektra ⚡

Type	Output stages [kW]	Airflow [m³/h]	Voltage [V]	HxWxD [mm]	Weight [kg]
Elektra C. For corrosive environments					
ELC331	0/🌀/2/3	400	230V~	375x300x340	13
ELC633	0/🌀/3/6	1000	400V3~	445x375x430	20
ELC933	0/🌀/4.5/9	1000	230V3~	445x375x430	20
ELC1533	0/🌀/7.5/15	1300	400V3~	445x375x430	20
Elektra F. For rooms where there is a risk of fire					
ELF331	0/🌀/2/3	400	230V~	375x300x340	13
ELF633	0/🌀/3/6	700	400V3~	375x300x340	13
ELF933	0/🌀/4.5/9	1000	400V3~	445x375x430	20
Elektra V. For use on ships and within the offshore industry					
ELV3333	0/🌀/1.5/3	400	400V3~	375x300x340	13
ELV3344	0/🌀/1.8/3.6	400	440V3~	375x300x340	13
ELV5333	0/🌀/2.5/5	700	400V3~	375x300x340	13
ELV6344	0/🌀/3/6	700	440V3~	375x300x340	13
Elektra H. For rooms with high temperatures					
ELH633	0/🌀/3/6	1000	400V3N~	445x375x430	20
ELH933	0/🌀/4.5/9	1000	400V3N~	445x375x430	20

Protection class Elektra C/F: IP65, Elektra V/H: IP44.

Approved by SEMKO and CE compliant. Elektra V is approved by Det Norske Veritas.

**Dimensions**

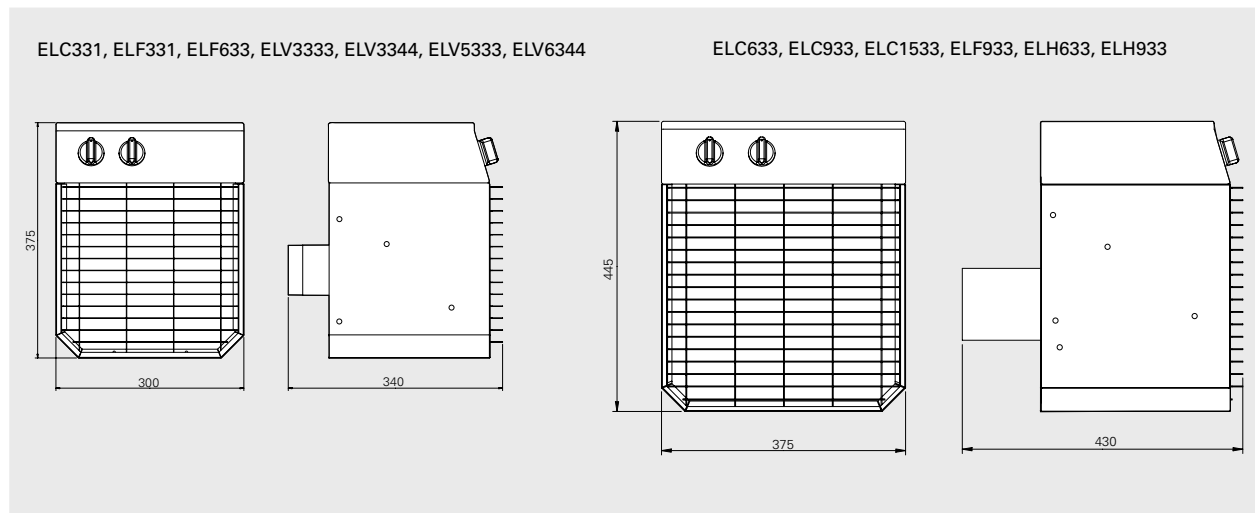

**Mounting**

Elektra is primarily intended for wall mounting, but the brackets can be angled for portable use.

The heat output is controlled by the built in thermostat (+5 – +35°C). Elektra H has a thermostat with setting range 0 – 70°C.

The on/off mode, and half or full heat output can be controlled with the output selector on the unit or with an external control panel mounted on to the wall for easy access.

**Accessories**

Type	Description
ELSRT	Control panel and thermostat, for ELC/ELV, start/stop
ELS	Control panel, for ELF, start/stop
ELRT	Thermostat, for ELH